

HDT / VSP TESTER
 SULPHATED ASH CONTENT (MUFFLE TESTER)
 BULK DENSITY TESTER




Heat Deflection Tester Vicat Softening Point Tester

Description	Single Station	Two Station	Four Station	Six Station
Temperature Range	Ambient to 200 °C	Ambient to 200 °C	Ambient to 200 °C	Ambient to 200 °C
Temperature Ramp	0.1 °C	0.1 °C	0.1 °C	0.1 °C
Linear Measurement	LVDT	LVDT	LVDT	LVDT
Range	0. To 10 MM			
Least Count	0.01Gm.			
Power	Single Phase 100 / 120 / 220 /240 V AC / 50/60 Hz. 1.2 KVA / Supply voltage fluctuation within ± 10 % of the set Value.			
Software Requirement	On Request.			

Sulphated Ash Content (Muffle Tester)

Temperature range	Ambient to 1000 °C.
Temperature Resolution	1°C
Power Requirement	1.5 Kw.
Furnace Size	9" x 4" x 4" / 12" x 6" x 6"

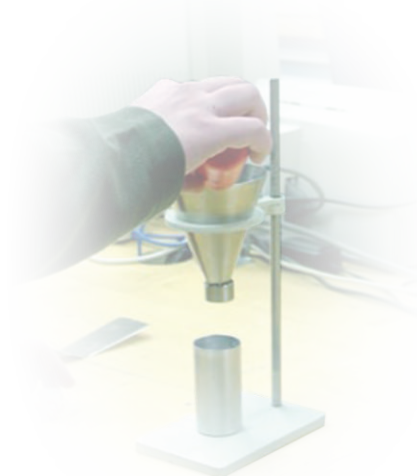

www.deeshaimpex.com

