




**DEESHA IMPEX**

PIPE "V" NOTCH CUTTER & NOTCH CUTTER  
CARBON BLACK CONTENT ○ ○ ○

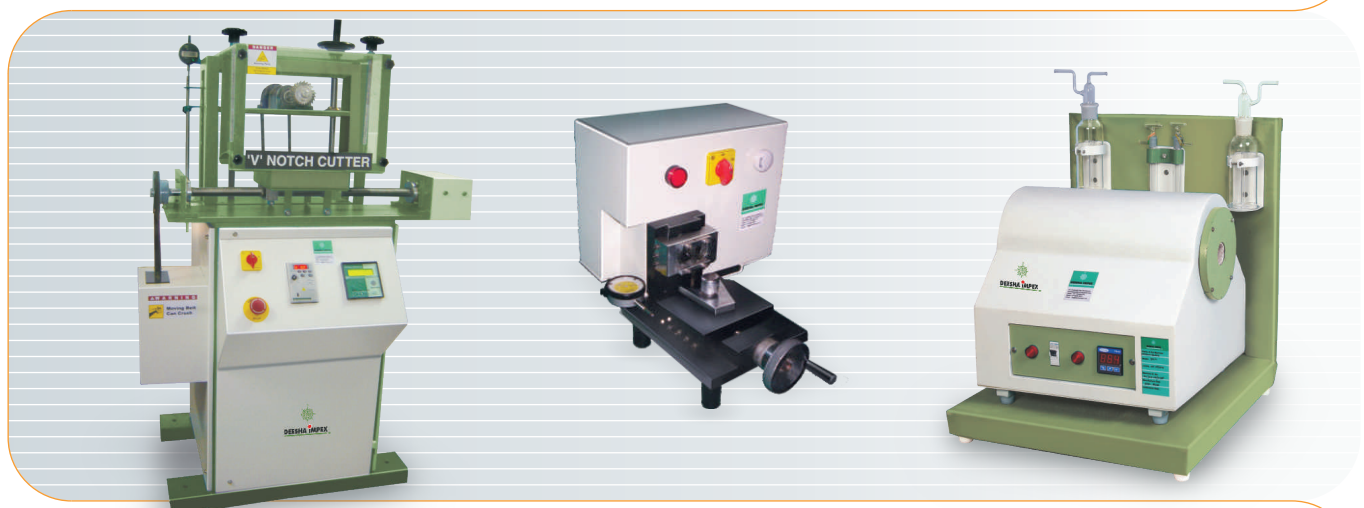

### Pipe V Notch Cutter

Pipe Diameter	up to 180 mm.
Notch Length	PCB Controlled
Notch Speed	Adjustable
Notch Depth	60°
Least Count	0.01 mm.
Control	Microprocessor Controller
Power	Single Phase 100 / 120 / 220 /240 V AC / 50/60 Hz. 1.2 kVA. Supply voltage fluctuation within ± 10 % of the set Value.

### Notch Cutter

Sample	One
Speed	Matric or Imperial Traverse
Notch Depth	Micro Adjustment
Driven	Motorized
Power	Single Phase 100 / 120 / 220 /240 V AC / 50/60 Hz. 1.2 kVA. Supply voltage fluctuation within ± 10 % of the set Value.

### Carbon Black Content Tester

Temperature range	100 – 950 °C
Temp. Controller / Sensor	PID / K Type
Accuracy	± 0.5 %
Least Count	0.1 °C
Heater	1 Kw.
Power	Single Phase 100 / 120 / 220 /240 V AC / 50/60 Hz. 1.2 kVA. Supply voltage fluctuation within ± 10 % of the set Value.

